

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
31 May 2001 (31.05.2001)


PCT

(10) International Publication Number  
**WO 01/39384 A1**

- (51) International Patent Classification<sup>7</sup>: H04B 1/06, 3/00 (74) Agent: ERICSSON MICROELECTRONICS AB; Department for Intellectual Property Rights, S-164 81 Kista-Stockholm (SE).
- (21) International Application Number: PCT/SE00/02130
- (22) International Filing Date: 31 October 2000 (31.10.2000) (81) Designated States (*national*): AE, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, UZ, VN, YU, ZA, ZW.
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data: 9904238-4 23 November 1999 (23.11.1999) SE (84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).
- (71) Applicant: TELEFONAKTIEBOLAGET LM ERICSSON (publ) [SE/SE]; S-126 25 Stockholm (SE).
- (72) Inventors: JOHANSSON, Albin; Sleipnervägen 95, S-136 42 Haninge (SE). BARKARÖ, Stefan; Plogvägen 3, S-169 59 Solna (SE).
- Published:  
— With international search report.

[Continued on next page]

(54) Title: SIGNAL LEVEL ADJUSTMENT ARRANGEMENT

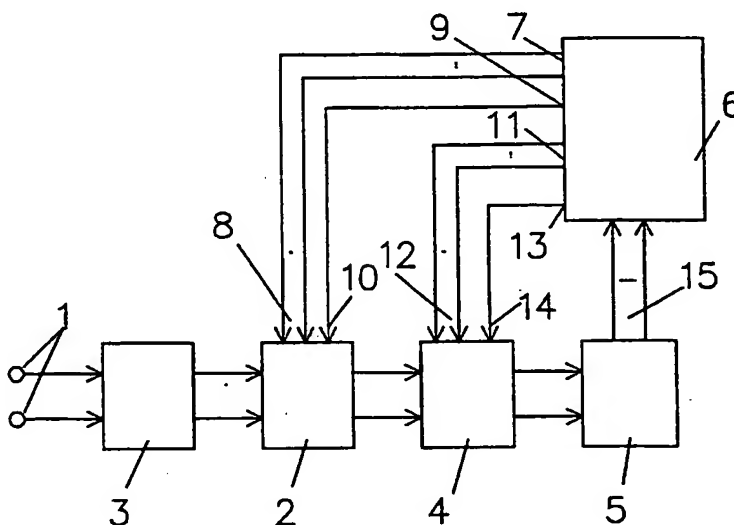

(57) Abstract: For signal level adjustment of a multitone signal received over a transmission line (1) during a training sequence in a DSL system, a programmable high-pass filter (2) is connected to the transmission line (1). A programmable gain control unit (4) is connected between the filter (2) and an A/D converter (5). A digital signal processor (6) is connected with its inputs to the A/D converter (5), with control outputs (7, 9) to control inputs (8, 10) of the filter (2), and with control outputs (11, 13) to control inputs (12, 14) of the gain control unit (4). The processor (6) detects signal level differences between the highest and the lowest tone of the multitone signal and programs the filter (2) to make the signal levels of the highest and the lowest tone equal. The processor (6) furthermore programs the gain control unit (4) to adjust its total signal output level to coincide with the dynamic range of the A/D converter (5).

BEST AVAILABLE COPY

WO 01/39384 A1



*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

**SIGNAL LEVEL ADJUSTMENT ARRANGEMENT****TECHNICAL FIELD**

5 The invention relates generally to digital subscriber line systems and more specifically to an arrangement for signal level adjustment of multitone signals in such systems.

**BACKGROUND OF THE INVENTION**

10 In digital subscriber line (DSL) systems, analog signals are communicated between central offices and subscriber's premises over standard telephone lines.

In e.g. asymmetric digital subscriber line (ADSL) systems, the analog signals are multitone signals comprising up to 255 tones with a separation of 4.3 kHz.

15 According to standards regulating ADSL systems, the transmitted maximum power spectral density (PSD) is specified as a constant value, i.e. it is the same for all tones or frequencies.

20 However, a transmitted signal will be damped over the telephone line before it reaches the other side. Moreover, the damping will vary with frequency such that tones at lower frequencies will be damped less than tones at higher frequencies. Also, the damping will vary with the length of the telephone line such that a longer telephone line will damp the signal more than a shorter telephone line.

25 Thus, even if the transmitted PSD is regulated by the standard to be constant, the PSD of the received signal at the receiving side will vary with frequency.

30 The bit rate of an ADSL link is the sum of the bits allocated to each individual tone divided by the frame time, which is regulated by standard to be 246.3  $\mu$ sec. It is permissible to allocate up to 15 bits per tone. The actual number of bits that can be

used in practice on a tone is decided during a so-called "training sequence" that is started when an ADSL modem is powered up. During the training sequence, the far end side sends a predefined pattern with a constant PSD, while the receiving side calculates the signal-to-noise ratio (SNR) for each incoming tone. The number of bits that can be used on each tone, is then calculated by an algorithm that can be approximated by

$$\text{SNR} > 3N + 9.6 + G_m + G_c,$$

where N is the number of bits allocated to a tone, and  $G_m$  and  $G_c$  are constants.

This means that the higher the SNR is in the receiver, the more bits can be allocated to a tone.

The noise level in a receiver is usually approximately a white noise, i.e. a constant PSD for all frequencies, and often decided by an A/D converter in the receive path.

Since the receiver noise floor is approximately white and the received signal varies a lot with frequency, fewer bits can be allocated to tones at higher frequencies compared to tones at lower frequencies due to a lower SNR.

## SUMMARY OF THE INVENTION

The object of the invention is to increase the bit rate in a multitone DSL system without changing the standard while still meeting the standard.

This is attained in accordance with the invention by means of a programmable filter in the receive path that boosts higher frequencies more than lower frequencies.

By the use of the programmable filter, it will be possible to obtain a flat PSD for the received signal during the training sequence.

## BRIEF DESCRIPTION OF THE DRAWING

The invention will be described more in detail below with reference to the appended drawing, on which the single figure shows an embodiment of an arrangement according to the invention for signal level adjustment of a multitone signal received  
5 over a transmission line.

## DESCRIPTION OF THE INVENTION

The drawing is a schematic block diagram of an arrangement according to the invention for signal level adjustment of a multitone signal received over a transmission line 1 in a DSL system, e.g. an ADSL system.  
10

In the embodiment illustrated, the transmission line 1 is connected to an input of a programmable high-pass filter 2 via a preamplifier 3. It should be pointed out that the preamplifier 3 is not necessary in all applications, but the transmission line 1  
15 can be directly connected to the input of the high-pass filter 2. The programmable high-pass filter 2 can be any known such filter.

The output of the filter 2 is connected to an input of a programmable gain control (PGC) unit 4 the output of which is connected to an input of an analog-to-digital (A/D) converter 5. The PGC unit 4 can be any known such unit.  
20

An output signal bus 15 of the A/D converter 5 is connected to a set of inputs of a digital signal processor (DSP) 6, having a set of control outputs 7 connected to a set of control inputs 8 of the filter 2, an enable output 9 connected to an enable input 10  
25 of the filter 2, a set of control outputs 11 connected to a set of control inputs 12 of the PGC unit 4, and an enable output 13 connected to an enable input 14 of the PGC unit 4.

The operation of the arrangement according to the invention in connection with a  
30 training sequence will be described below.

A multitone signal sent out by an ADSL transceiver (not shown) will be received on the transmission line 1.

5 To start with, the enable outputs 9 and 13 of the DSP 6 are both low, which means that the received multitone signal will pass through the filter 2 and the PGC unit 4 directly to the A/D converter 5.

10 In the A/D converter 5, the received multitone signal is converted into a digital signal and supplied to the DSP 6.

In the DSP 6, the signal level of the highest and the lowest tone of the multitone signal are analyzed.

15 Normally, the highest tone has considerably lower signal strength than the lowest tone, and thereby also a lower SNR.

20 The DSP 6 sets its enable output 9 high. Hereby, the filter 2 is enabled for programming. Via the set of control outputs 7 of the DSP 6, the filter 2 is programmed such that the signal strengths of the highest tone and the lowest tone become equal. During the programming process, this is monitored by the DSP 6.

The enable output 9 of the DSP 6 is then again set low. Thereafter, the enable output 13 of the DSP 6 is set high, to enable the PGC unit 4 for programming.

25 Via the set of control outputs 11, the DSP 6 programs or adjusts the gain of the PGC 4 such that the total signal level from the PGC 4 coincides with the dynamic range of the A/D converter 5. During the programming process, this is monitored by the DSP 6.

30 Thereafter, the enable output 13 of the DSP 6 is again set low and the training sequence is terminated.


As should be apparent from the above, the SNR will now be equal at all frequencies, which means that the total number of bits that can be allocated to an ADSL frame will be higher and, consequently, that the bit rate will increase.

## CLAIMS

1. An arrangement for signal level adjustment of a multitone signal received over a transmission line during a training sequence in a digital subscriber line system,  
5 **characterized in** that it comprises
- a programmable high-pass filter (2) connected with its input terminal to the transmission line (1),
  - a programmable gain control unit (4) connected with its input terminal to the output terminal of the high-pass filter (2), and with its output terminal to an input  
10 terminal of an analog-to-digital converter (5),
  - a digital signal processor (6) connected with its input terminals to an output bus (15) of the analog-to-digital converter (5), with first control output terminals (7, 9) to control input terminals (8, 10) of the high-pass filter (2), and with second control output terminals (11, 13) to control input terminals (12, 14) of the programmable  
15 gain control unit (4), the digital signal processor (6) being adapted to detect a signal level difference between the highest and the lowest tone of the multitone signal and in response to the detected difference, program the high-pass filter (2) via its control input terminals (8, 10) to make the signal level of the highest tone equal to the signal level of the lowest tone, the digital signal processor (6) furthermore being  
20 adapted to program the programmable gain control unit (4) via its control input terminals (12, 14) to adjust the total signal level on its output terminals to coincide with the dynamic range of the analog-to-digital converter (5).
2. The arrangement as claimed in claim 1, **characterized in** that the input terminal  
25 of the programmable high-pass filter (2) is connected to the transmission line (1) via a preamplifier (3).



1 / 1

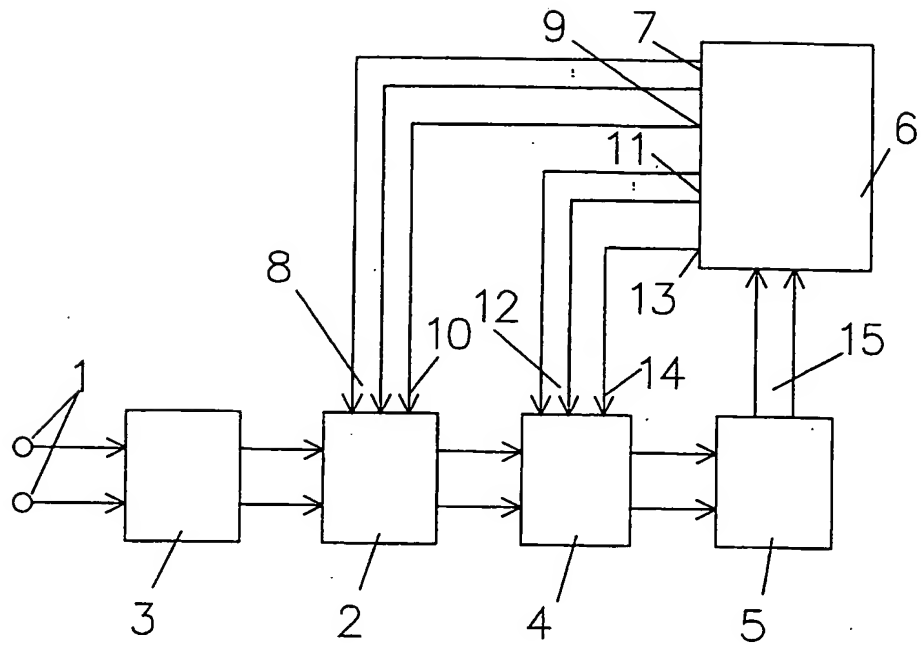

## INTERNATIONAL SEARCH REPORT

International application No.

PCT/SE 00/02130

## A. CLASSIFICATION OF SUBJECT MATTER

IPC7: H04B 1/06, H04B 3/00

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC7: H04B, H03K, H03M

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

SE,DK,FI,NO classes as above

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	WO 9967880 A1 (ELUL, RAFAEL), 29 December 1999 (29.12.99), page 3, line 13 - page 5, line 16, figure 1, abstract  --	1-2
A	US 5568064 A (GREGORY E. BEERS ET AL), 22 October 1996 (22.10.96), column 2, line 43 - column 4, line 12, figure 3, abstract  --	1-2

☒ Further documents are listed in the continuation of Box C.☒ See patent family annex.

\* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"I" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&amp;" document member of the same patent family

Date of the actual completion of the international search

20 February 2001

Date of mailing of the international search report

05-03-2001

Name and mailing address of the ISA/

Swedish Patent Office

Box 5055, S-102 42 STOCKHOLM

Facsimile No. +46 8 666 02 86

Authorized officer

David Forneheim/MN

Telephone No. +46 8 782 25 00

Form PCT/ISA 210 (second sheet) (July 1998)

## INTERNATIONAL SEARCH REPORT

International application No.

PCT/SE 00/02130

## C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	JP 8335878 A (FUJITSU GENERAL LTD) 1996-12-17 (abstract) World Patents Index (online). London, U.K.: Derwent Publications, Ltd. (retrieved on 2000-08-18). Retrieved from EPO WPI Database DW 199709, Accession No. 1997-097671; JP 8335878 A (FUJITSU GENERAL LTD) 1997-04-30 (abstract), (online) (retrieved on 2000-08-18). Retrieved from EPO PAJ Database. see figure 1  --	1-2
A	WO 9300751 A1 (MICROCOM SYSTEMS, INC.), 7 January 1993 (07.01.93), page 6, line 29 - page 7, line 32, figures 1,5-7, abstract  --	1-2
A	US 4688245 A (HEINRICH SCHENK), 18 August 1987 (18.08.87), column 2, line 39 - column 3, line 35, figure 2, abstract  -- -----	1-2

**INTERNATIONAL SEARCH REPORT**  
Information on patent family members

International application No.  
PCT/SE 00/02130

Patent document cited in search report			Publication date	Patent family member(s)		Publication date
WO	9967880	A1	29/12/99	AU	1096200 A	17/04/00
				AU	4956799 A	10/01/00
				WO	0018888 A	06/04/00
<hr/>						
US	5568064	A	22/10/96	CA	2206246 A	01/08/96
				CN	1193853 A	23/09/98
				CZ	9702257 A	18/03/98
				DE	69601071 D,T	15/07/99
				EP	0806085 A,B	12/11/97
				JP	3024058 B	21/03/00
				JP	8320747 A	03/12/96
				KR	196891 B	15/06/99
				PL	321324 A	08/12/97
				US	5578939 A	26/11/96
				WO	9623358 A	01/08/96
				CA	2216367 A	14/11/96
				DE	69601425 D,T	19/08/99
				EP	0827643 A,B	11/03/98
				JP	8331002 A	13/12/96
				PL	180133 B	29/12/00
				PL	323192 A	16/03/98
				RU	2142194 C	27/11/99
				WO	9636114 A	14/11/96
<hr/>						
WO	9300751	A1	07/01/93	AU	2295292 A	25/01/93
				US	5241565 A	31/08/93
<hr/>						
US	4688245	A	18/08/87	AT	50474 T	15/03/90
				AU	574965 B	14/07/88
				AU	3607184 A	06/06/85
				CA	1226346 A	01/09/87
				DE	3343584 A	13/06/85
				DE	3481398 D	00/00/00
				EP	0144067 A,B	12/06/85
				SE	0144067 T3	
				FI	76656 B,C	29/07/88
				FI	844744 A	02/06/85
				HU	37700 A	23/01/86
				HU	190980 B	28/12/86
				JP	1954622 C	28/07/95
				JP	6081082 B	12/10/94
				JP	60136429 A	19/07/85
				LU	85402 A	11/09/84
				NO	166390 B,C	02/04/91
				NO	844602 A	03/06/85
				SU	1699358 A	15/12/91
				YU	195284 A	31/12/87
				ZA	8409349 A	31/07/85
				DE	3414523 A	24/10/85
				DE	3414534 A	24/10/85
				DE	3414554 A	24/10/85
<hr/>						

**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

**BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☐ **FADED TEXT OR DRAWING**
- ☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☒ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:** \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**